

Vibration feeder

Abrasive

✓ Zinc ore

Function

✓ Bottom plate in vibration feeder

Processing

✓ Bolt on mounting

Comparative tests




NEW BOLIDEN

Compared solutions	Service life T/mm (tonnage 1,8MT, 32 weeks in use)
HB 450, thickness 30mm	112.500 T/mm
CREUSABRO® Dual® plate, thk 20mm	360.000 T/mm

CREUSABRO® Dual®
+ 220%

**BERGS
MEKANISKA**

Vibration feeder for zinc ore, measuring the wear

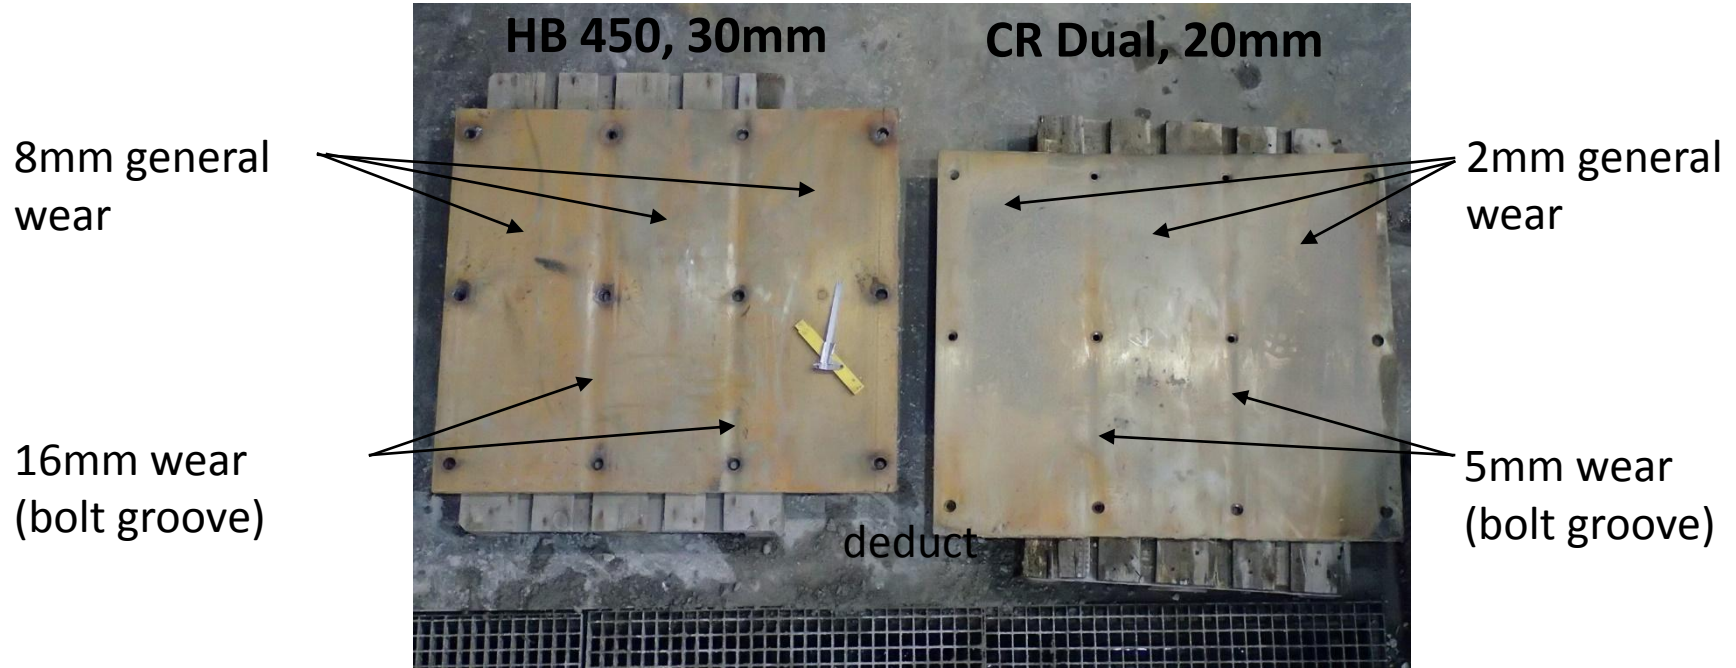

BOLIDEN

Compared solutions	General wear	Wear in bolt groove
HB 450, thickness 30mm	8mm (30mm → 22mm)	16mm (30mm → 14mm)
CREUSABRO® Dual® plate, thickness 20mm	2mm (20mm → 18mm)	5mm (20mm → 15mm)

CREUSABRO® Dual®
up to 4 times longer servicelife

BERGS
MEKANISKA